

BG12864J




Feature

1. COB with metal frame
2. Built-in controller SBN0064G/6400G
3. +5V single power supply, with built-in negative voltage
4. 1/64 duty cycle
5. LED edge B/L
6. LED B/L pins: 23/24 or 1/2
7. Option: Temperature compensation circuit
8. Option: External negative voltage
9. DIP module



Mechanical Data

Item	Standard Value	Unit
Module Dimension	75.0 x 45.8	mm
View Area	61.0 x 38.0	mm
Dot Size	0.42 x 0.50	mm
Dot Pitch	0.44 x 0.52	mm

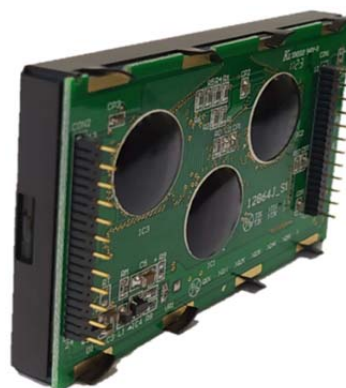



Pin Assignment

Pin	Symbol	Function
1	Vss	GND
2	Vdd	Power supply
3	VO	Operating voltage for LCD
4	/RST	Reset signal
5	D/I	Data/Instruction
6	R/W	Data read/write
7	E1	Enable signal for IC2 (segment 1~64)
8	E2	Enable signal for IC3 (segment 65~128)
9	CS1L	Chip selection for IC2 (segment 1~64)
10	CS1H	
11	CS2L	Chip selection for IC3 (segment 65~128)
12	CS2H	
13	VEE	Negative voltage output
14	NC	No connection
15~22	DB0~BD7	Data bus
23	A	Power supply for B/L (+)
24	K	Power supply for B/L (GND)

Electronic Characteristics

Item	Symbol	Condition	Typical Value	Unit
Input Voltage	Vdd	Vdd = +5V	5.0	V
Supply Current	Idd	Vdd = +5V	5.0	mA
LCD Driving Voltage	Vdd-Vo	25°C	10.0	V

Dimension

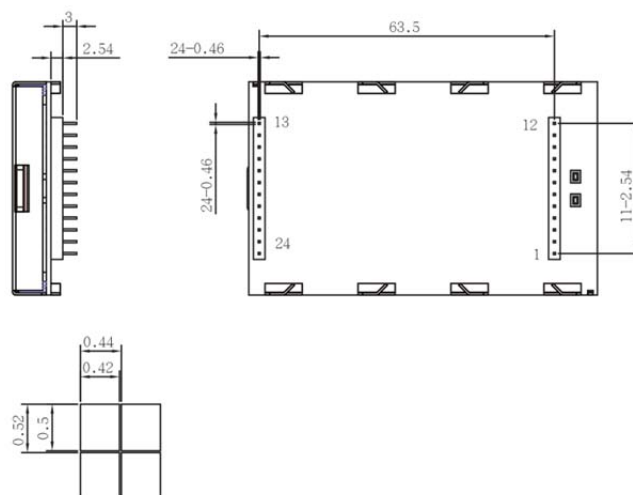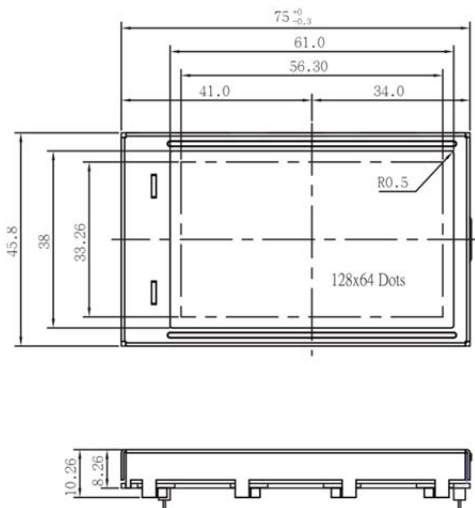

Dot size
Scale 20:1